

GUARDIAN

FALL PROTECTION

PERFORMANCE SAFETY GEAR

Angel Anchor

Part #: 00260


Prior to use, read and understand all manufacturer's instructions provided with equipment at time of shipment from manufacturer.

Compliant with all OSHA 1910, OSHA 1926 Subpart M, ANSI Z359.1-2007, and ANSI A10.32-2004 regulations.

Components and Product Specifications:

Angel Anchor Material: Made from 100% steel.

***Recommended for use with Swivel Top attachment (#00380, not included). Always consider height of tie-off to anchorage connector relative to harness D-ring attachment, and account for variations in fall clearance and free fall calculations. Refer to 00380 instruction manual for correct attachment procedure.**

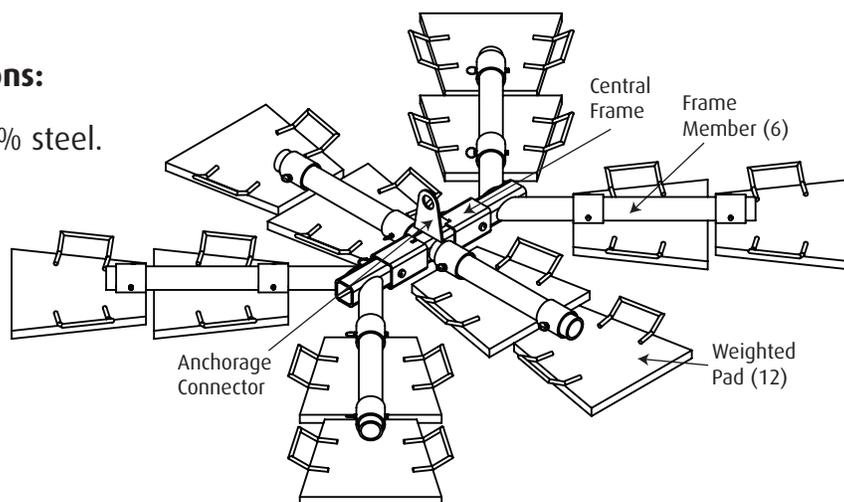

Understand the following definitions and fall safety applications:

Competent Person: A highly trained and experienced person who is ASSIGNED BY THE EMPLOYER to be responsible for all elements of a fall safety program, including, but not limited to, its regulation, management, and application. A person who is proficient in identifying existing and predictable fall hazards, and who has the authority to stop work in order to eliminate hazards.

The Angel Anchor is compatible with the following applications:



Fall Arrest: An application where a worker is exposed to a fall hazard. When working in Fall Arrest applications, a complete and compatible Personal Fall Arrest System (PFAS), which includes a full-body harness, shock absorbing lanyard or self-retracting lifeline, and an anchorage connector, **MUST** be used. Maximum 6' free fall. Capacity range is 130-310 lbs. (including equipment). Structure must withstand weight of Angel Anchor, and all users and equipment.



Restraint: An application where a worker is restrained from reaching the leading edge of a fall hazard. When working in Restraint applications, a complete and compatible PFAS **MUST** be used. No free fall is permitted. Capacity range is 130-310 lbs. (including equipment). Structure must withstand weight of Angel Anchor, and all users and equipment.

Suitable for use in temporary horizontal lifeline applications. All installation and maintenance of horizontal lifelines must be done under the supervision of a Qualified Person. Contact Guardian with any questions.

FOR ALL APPLICATIONS, MAXIMUM 1 ATTACHMENT TO ANCHORAGE CONNECTOR AT ANY TIME.

85006 (Rev. A)

